



MODEL CR9V-FP
Lithium Manganese Dioxide
(Li-MnO₂) Battery

ELECTRICAL CHARACTERISTICS

Typical values for cells stored for one year or less, at 23°C

■ **Nominal capacity** **1,200 mAh**
 at 9 mA, +23°C, 5.4 V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off voltage.

■ **Rated voltage** **9.0 V**

■ **Maximum recommended continuous current** **300 mA**
 to get 50% of the nominal capacity at +23°C with a 5.4V cut off. Higher currents possible—consult OmniCel.

■ **Maximum pulse current capability** **500 mA**

■ **Pulse capability:** varies according to pulse characteristics (frequency and duration), temperature, cell history (storage conditions prior to usage) and the application's acceptable minimum voltage. Consult OmniCel.

■ **Storage** **-40°C / +60°C**

■ **Operating temperature range** **-40°C / +60°C**
 (Operation at temperature different from ambient may lead to reduced capacity and lower voltage plateau readings.)

⚠ WARNING:

Risk of fire and burns. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used Lithium Batteries or other battery types.

TRANSPORTATION:

For a complete description of transportation regulations and definitions of the transportation regulations and definitions of the transportation classifications "Excepted" and "Class 9" refer to the OmniCel website at www.omnicel.com.

KEY FEATURES

- ✓ High energy density
- ✓ Wide operating temperature range
- ✓ Lightweight
- ✓ Lasts up to 5X longer than 9V alkaline
- ✓ Stable operating voltage
- ✓ High pulse current capability
- ✓ Low self discharge rate



⚡ **Underwriters Laboratories (UL)**
 Component Recognition
 (File Number MH 46565)

MAIN APPLICATIONS

- ✓ Instrumentation
- ✓ Smoke detectors
- ✓ Music/audio devices
- ✓ Medical equipment
- ✓ Wireless equipment
- ✓ Active RFID
- ✓ GPS/GSM system

CR9V-FP

TYPICAL CONTINUOUS DISCHARGE CAPACITY @25°C

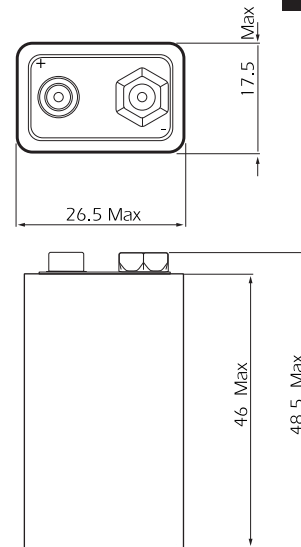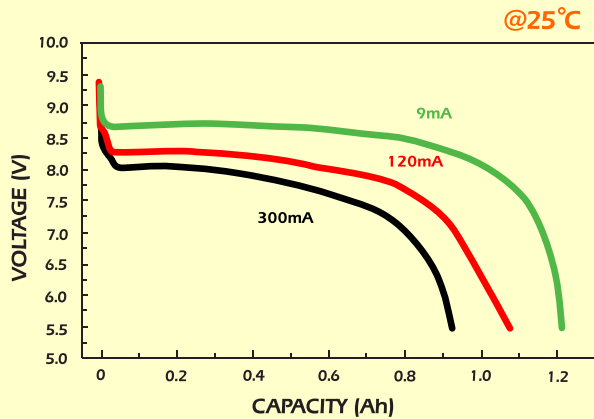


Exterior/Housing: Nickel-plated Steel

Terminals/Connector: Nickel-plated Miniature Snap

TYPICAL DISCHARGE VS. TEMPERATURE


900 Ω Continuous Discharge

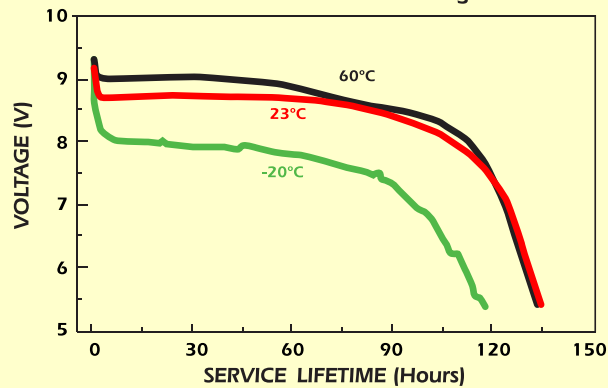

PHYSICAL CHARACTERISTICS

Length (max)	26.0 mm (1.04")
Width (max)	17.5 mm (0.69")
Height (max)	48.5 mm (1.91")
Weight (max)	40.0 g (1.41 oz)

TYPICAL 60Ω CONTINUOUS DISCHARGE @25°C

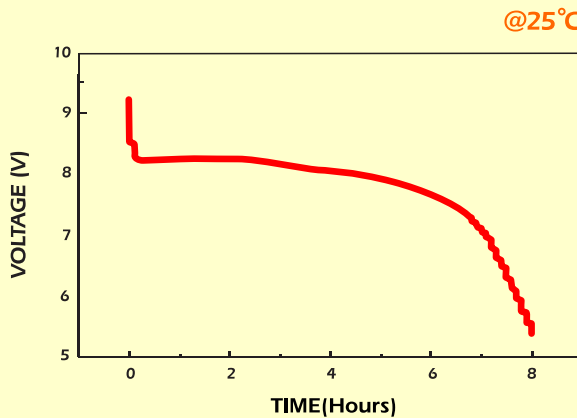

SHORT CIRCUIT TEMPERATURE VS. CURRENT VS. TIME

